




# 2GIG GC3 Wireless Secondary Touchscreens

2GIG-SP1-GC3 Secondary Touchscreen

2GIG-SP2-GC3 Secondary Touchscreen



**2GIG-SP1-GC3**

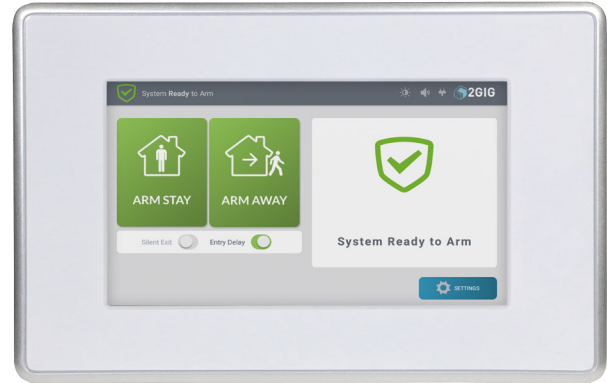

**2GIG-SP2-GC3**

✓	7" FULL COLOR TOUCHSCREEN	✓
✓	WALL MOUNT OR DESK MOUNT (USING 2GIG-DESK)	✓
✓	CONNECTS VIA WIFI	✓
✓	SECURITY CONTROL – VIEW STATUS, BYPASS, ARM, DISARM	✓
✓	CHIME	✓
✓	VOICE ANNUNCIATIONS	
✓	AUTOMATION CONTROL – SCENES, ROOMS & BOOKMARKS	
✓	VIEW WEATHER DATA	

## MULTIPLE CONTROL OPTIONS FOR GC3

*Add up to four wireless touchscreens to provide system control, wherever it's convenient.*

### 2GIG-SP1-GC3

Offers the exact same control features as the main GC3 panel. Full security control, as well as control over automation devices, including Scenes, Rooms and Bookmarking options. The 2GIG-SP1-GC3 also displays full five day weather display.

### 2GIG-SP2-GC3

Can be mounted on a wall or desk using 2GIG-CP-DESK Accessory (sold separately). This touch screen shows system status, bypass zones, arm stay, arm away or disarm.



**2GIG-SP1-GC3**

### Panel

7" capacitive touch screen

Resolution: 800 x 480 pixels

One-touch arming

Capacitive-touch buttons – Home, Emergency

Dimensions: 8.9" x 5.7" x 1.25"

Time and date display

5-day weather forecast

Firmware updates:

- Over-the-air
- USB

### Communication

Connects via WiFi, GC3 Access Point or Ethernet

### Automation

Create and execute Scenes

Create Rooms

Bookmark Screen

### Installation

Third-hand strap

Integrated level

Easy-to-align center mark

### Power


100-240VAC 50/60Hz 1.7A 14VDC adapter

Lithium-Polymer backup battery

Operating Temperature: 0°C to 40°C, 32°F to 104°F

### Certifications

UL1023

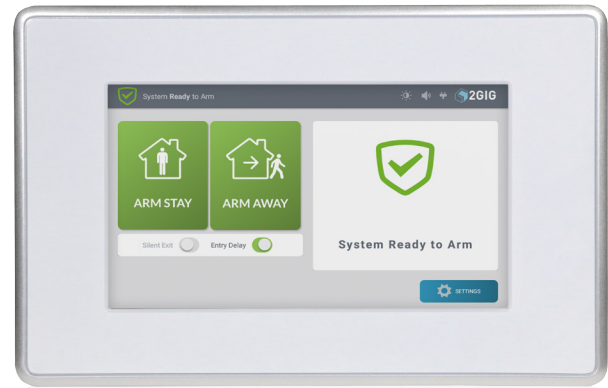

**2GIG-SP2-GC3**

### Panel

7" capacitive touch screen

Resolution: 1024 x 600 pixels

One-touch arming

Dimensions: 8.9" x 5.7" x 0.95"

Firmware updates:

- Over-the-air
- USB

### Communication

Connects via WiFi or GC3 Access Point

### Installation

Easy-to-use mounting template

Mounts to wall or uses desk mount (2GIG-CP-DESK)

### Power

100-240VAC 50/60Hz 0.2A 5VDC adapter

Rechargeable backup battery

Operating Temperature: 0°C to 40°C, 32°F to 104°F