

Add video to your 2GIG system powered by SecureNet with our new family of IP Cameras. These cameras add exceptional value, features, and ease-of-use and are the latest addition in our expanding SecureNet solution.

Powered by
SECURENET

Benefits:

- Receive notifications on smartphone
- Video on demand
- Search & playback recorded video
- Talk to those in your house remotely using audio intercom
- Record video/audio to camera or cloud
- Night vision, see in total darkness
- Easy-to-Install


Features:

- Powered by SecureNet SmartLink+ app
- 802.11 b/g/n WiFi
- H.264 video compression
- 720p High Definition resolution
- Two-way audio (most models)
- IR-Cut Filter and IR LEDs for Night Vision

SecureNet SmartLink+ app also supports:

- 2GIG RELY System
- 2GIG GC2 System

SmartLink+ App Interface

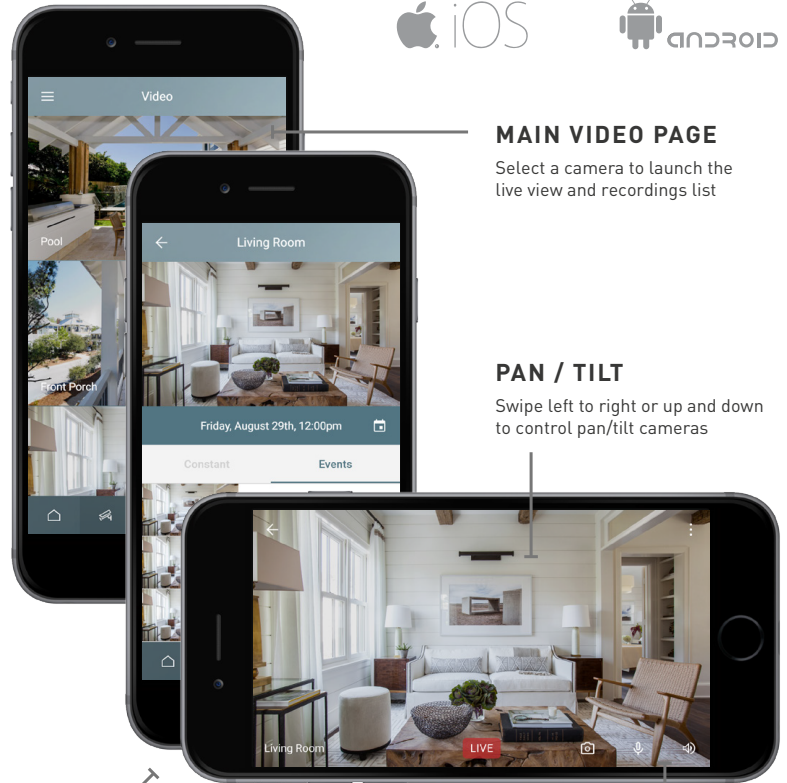

MAIN VIDEO PAGE
Select a camera to launch the live view and recordings list

PAN / TILT
Swipe left to right or up and down to control pan/tilt cameras

ROTATE THE SCREEN
Hold the screen horizontally to view full screen live video

VOLUME AND MICROPHONE
Toggle the **Volume** (speaker) icon to listen to audio captured through the camera.
Tap the **Microphone** icon to display the red overlay **Push to Talk** button. Hold the Push to Talk button to talk through the camera.



2GIG Indoor WiFi Camera
2GIG-CAM-101-NET



2GIG Indoor WiFi Pan/Tilt Camera
2GIG-CAM-111-NET



2GIG Indoor/Outdoor WiFi Bullet Camera
2GIG-CAM-131-NET



2GIG-CAM-101-NET
2GIG Indoor WiFi Camera



2GIG-CAM-111-NET
2GIG Indoor Wi Fi Pan/Tilt Camera



2GIG-CAM-131-NET
2GIG Indoor/Outdoor WiFi
Bullet Camera

Video Resolution	720p(1280x720,640x360,320x180)		
Compression	H.264 & MJPEG (32kbps -2Mbps)		
Night Vision	4 IR LEDs 15 FT Range	12 IR LEDs 24 FT Range	24 IR LEDs 60 FT Range
IR-Cut Filter	Yes	Yes	Yes
Camera Sensor	1/4" CMOS, 1 Mega Pixel		
Lens	f = 3.6mm, F = 2.0		
Viewing Angle	Horizontal: 60°		
Frame Rate	1 to 30 FPS		
Pan/Tilt	No	Horizontal: 350° Vertical	No
Audio	Two-Way	Two-Way	No
WiFi Connectivity	802.11 b/g/n (2.4Ghz)		
Wired Connectivity	10/100 Mbps RJ45 Ethernet		
Setup	WPS, Wired		
Motion Detection	Yes	Yes	Yes
Video Storage	MicroSD (Not included)	MicroSD (Not included)	64GB Micro SD (Included)
Power Input	5V DC, <4W	5V DC, <6W	SVDC, <SW
Shipping Dimensions			
Shipping Weight			
Temperature	Operating:-10c - 50C (10- 90% Humidity) Storage: -40 - 70 (3 - 90% Humidity)		
Regulatory	FCC, RoHS		
SmartPhone App	SmartLink+ (iOS & Android)		
Works With:	2GIG GC2 and RELY Systems, powered by SecureNet		

Requirements:

- SmartLink+ App requires smartphones supporting iOS 10 (or later) & Android Kit Kat 4.4 (or later) and subscription plan with SecureNet Technologies.
- Camera requires 120VAC outlet.
- Camera requires WiFi (802.11b/g/n) 2.4Ghz or direct connect Ethernet to router/switch.

Ordering Information:

2GIG-CAM-101-NET	2GIG Indoor WiFi Camera, Powered by SecureNet
2GIG-CAM-111-NET	2GIG Indoor WiFi Pan/Tilt Camera, Powered by SecureNet
2GIG-CAM-131-NET	2GIG Indoor/Outdoor WiFi Bullet Camera, Powered by SecureNet