

Security & Control Panel

2GIG-GC3-345



Exceptional Security & Control, now with Smart Areas™


The 2GIG GC3 is the easiest, most intuitive home control system in the industry. And now with Smart Areas™, it's even better. Smart Areas enables four security partitions in the 2GIG system, for added personalization, flexibility and performance. With its intuitive 7" touchscreen, integrated Z-Wave Plus radio and future-ready capabilities, the GC3 delivers unbeatable functionality, ease of use and fast installation.

Key Selling points:

- Our most advanced security panel yet.
- New! Smart Areas™ enables easy set-up of four security partitions for maximum peace of mind – the first in the market.
- The first self-contained partitioning panel in the marketplace.
- Big, 7" screen with smarter, more intuitive user interface.
- 2GIG's proven reliability and performance that is trusted by millions.

Key Features:

- Easy to install with integrated level, third-hand strap.
- Intuitive new user interface.
- Compatible with GC3 Secondary Touchscreens, Notification and Intrusion Sensors and much more.
- Integrated Z-Wave Plus radio supports Z-Wave devices for locks, lighting, thermostats and more.
- New Create Rooms and Bookmark Screen features tailored to each user's needs.

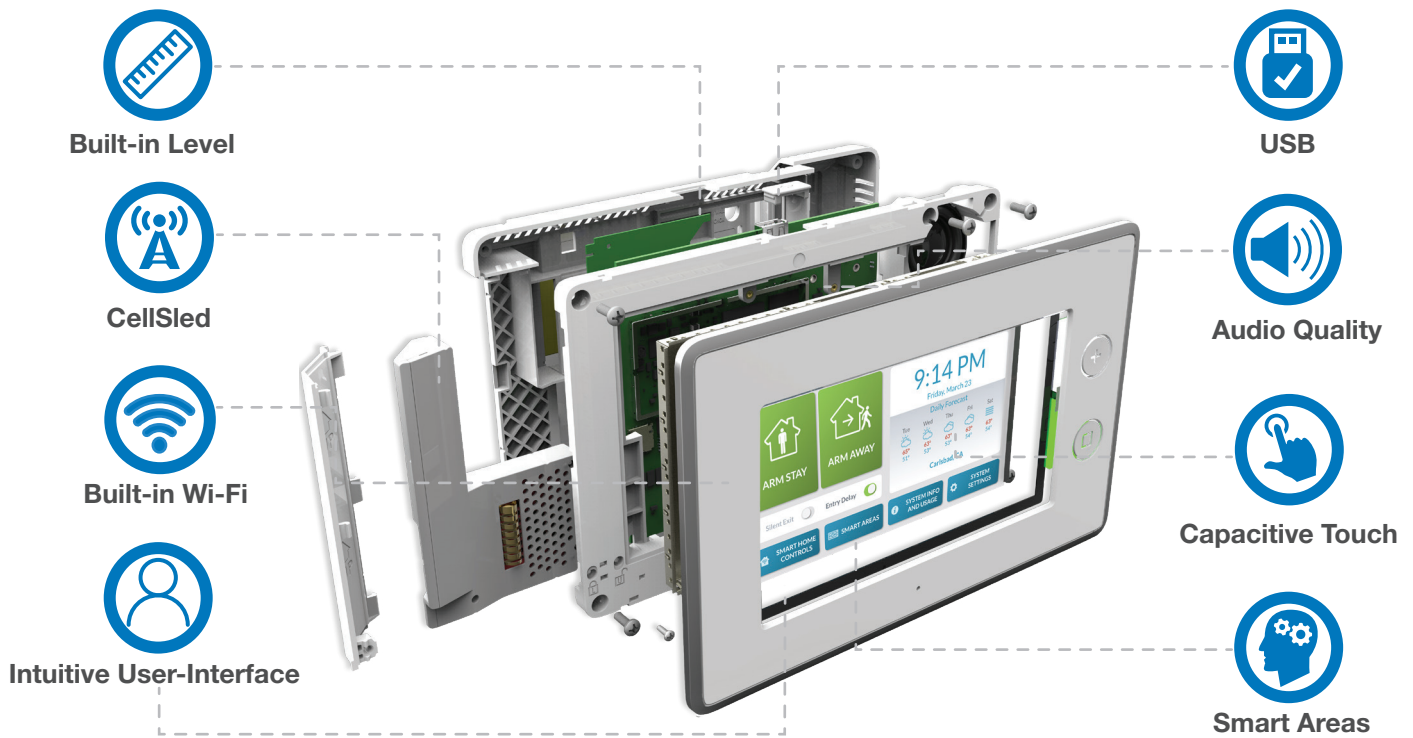

Panel

- 7" capacitive touchscreen
- Resolution:** 800x480 pixels
- One-touch arming**
- Capacitive-touch buttons** – Home, Emergency
- Built-In Dual-Band Wi-Fi 802.11**
- 5-day weather forecast**
- Firmware updates:**
 - Over-the-air
 - USB

Security

- 100 Wireless Zones**
- 2 Wired Zones**
- 32 Keyfobs**
- 8 Keypads**
- 2 Open Collector Outputs**
- Wired Bell Output**
- 100 Users**

Communication

- User-replaceable cell radio** with integrated antenna
- 4G LTE** – Verizon Network
- 3G** – AT&T or Rogers Network
- CDMA** – Verizon Network

Installation

- Third-hand strap**
- Integrated level**
- Easy-to-align center mark**
- At-a-glance programming**

Automation

- Integrated Z-Wave Plus radio**
- Supports up to 232 Z-Wave devices
- Create and execute Scenes**
- Create Rooms**
- Bookmark Screen**

Accessories

- 2GIG GC3 Wireless Secondary Touchscreens**
- 2GIG Notification Sensors**
- 2GIG Intrusion Sensors**
- 2GIG Security Sensors**
- GoControl Z-Wave Compatible Products**
- See <https://www.2gig.com/products/> for complete line of accessories

Power

- 100-240VAC 50/60Hz 1.7A 14VDC adapter
- Lithium-Polymer backup battery
- Operating Temperature: 32F to 104F (0C to 40C)

Certifications

- UL985, UL1023, UL1635
- ULC C1023, ULC S545-02 (Canada)
- ANSI/SIA CP-01 2010
- CSFM

Warranty

- Panel warranty:** Limited 3 years